


Introduction

The Wallpack Light distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire. The energy savings, long life and easy-to-install design of the Wallpack make it the smart choice for building-mounted doorway and pathway illumination for nearly any facility. Replaces 75W MH or HID fixtures, either case, with energy-savings of up to 75%.

ORDERING INFORMATION

EXAMPLE: WP401-13W-XXX-XX-XX

Series	Input	Power	Color	Options	Finish
WP401	110-277VAC	13W	30K 3000K	00 No DIMMING PC Photocell	BR Brown WH White BL Black GR Gray
WP402		26W	40K 4000K		
WP403		18W	45K 4500K 50K 5000K 57K 5700K		

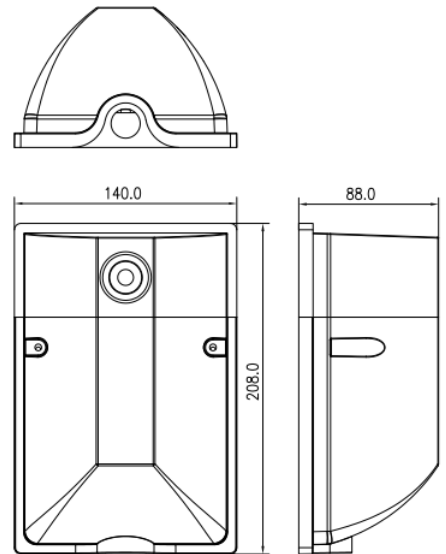

REGULATORY & VOLUNTARY QUALIFICATIONS

- Suitable for wet locations.
- Certified to ANSI C136.31-2001, 3G vibration standards.
- Luminaire and finish endurance tested to withstand 3,000 hours of elevated ambient salt fog conditions as defined in ASTM Standard B 117.
- RoHS compliant. Consult factory for additional details.
- Precision-molded proprietary acrylic lenses provide multiple photometric distributions tailored specifically to building mounted applications. The Wallpack Light are available in 3000K (70 min. CRI) or 5700K (70 min. CRI) configurations.

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Actual performance may differ as a result of enduser environment and application. Actual wattage may differ by +/- 10% when operating between 110-277VAC +/- 10%. Contact factory for performance data on any configurations not shown here.

Performance Data

MODEL	LEDS	LED		3000K, 70CRI		4000K, 70CRI		4500K, 70CRI		5000K, 70CRI		5700K, 70CRI	
		CURRE	WATTS	LUMENS	LPW	LUMENS	LPW	LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
WP401	24	0.08	13W	1500	115	1500	115	1500	115	1500	115	1500	115
WP402	42	0.09	26W	3000	115	3000	115	3000	115	3000	115	3000	115
WP403	30	0.09	18W	2000	115	2000	115	2000	115	2000	115	2000	115

Electrical Data

MODEL	LEDS	LED CURRENT	SYSTEM WATTS	Current			
				120	208	240	277
WP401	24	0.08	13W	0.11	0.06	0.05	0.04
WP402	42	0.09	26W	0.21	0.12	0.11	0.09
WP403	30	0.09	18W	0.15	0.08	0.07	0.06

Lumen Ambient Temperature (LAT) Multipliers

Ambient		Lumen Multiplier
0°C	32°F	1.02
10°C	50°F	1.01
20°C	68°F	1.00
25°C	77°F	1.00
30°C	86°F	1.00
40°C	104°F	0.99

ELECTRICAL SYSTEM

- Input Voltage: 110-277V, 50/60Hz
- Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load
- Luminaire is qualified to operate at ambient temperatures of -40°C to +50°C.

FINISH

Exterior parts are protected by Super Durable thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in textured and non-textured finishes.

WARRANTY

- Five year limited warranty is standard on luminaire and components.